
SPECIFICATION OF
LCD MODULE
PRODUCT NO.: LMBHA_014_

SPEC. NO.: LM014-0-△


CUSTOMER
APPROVED BY
DATE:

SALE MANAGER	TECHNICAL APPROVE	DESIGN MANAGER	DESIGN CHECK	DESIGNER

1. MECHANICAL DATA

- (1) Product No. LMBHA_014_ _____
- (2) Module Size 170.0 (W)mm x 102.0 (H)mm x MAX 14.0 (D)mm
- (3) Dot Size 0.47 (W)mm x 0.47 (H)mm
- (4) Dot Pitch 0.5 (W)mm x 0.5 (H)mm
- (5) Number of Dots 240 (W) x 128 (H)Dots
- (6) Duty 1/128
- (7) LCD Display Mode STN: Gray Mode Yellow Mode Blue Mode
 FSTN: Black and White(Normal White/Positive Image)
 Black and White(Normal Black/Negative Image)
 Rear Polarizer: Reflective Transflective Transmissive
- (8) Viewing Direction 6 O'clock 12 O'clock ____O'clock
- (9) Backlight CCFL
- (10) Weight 220 g

Note :

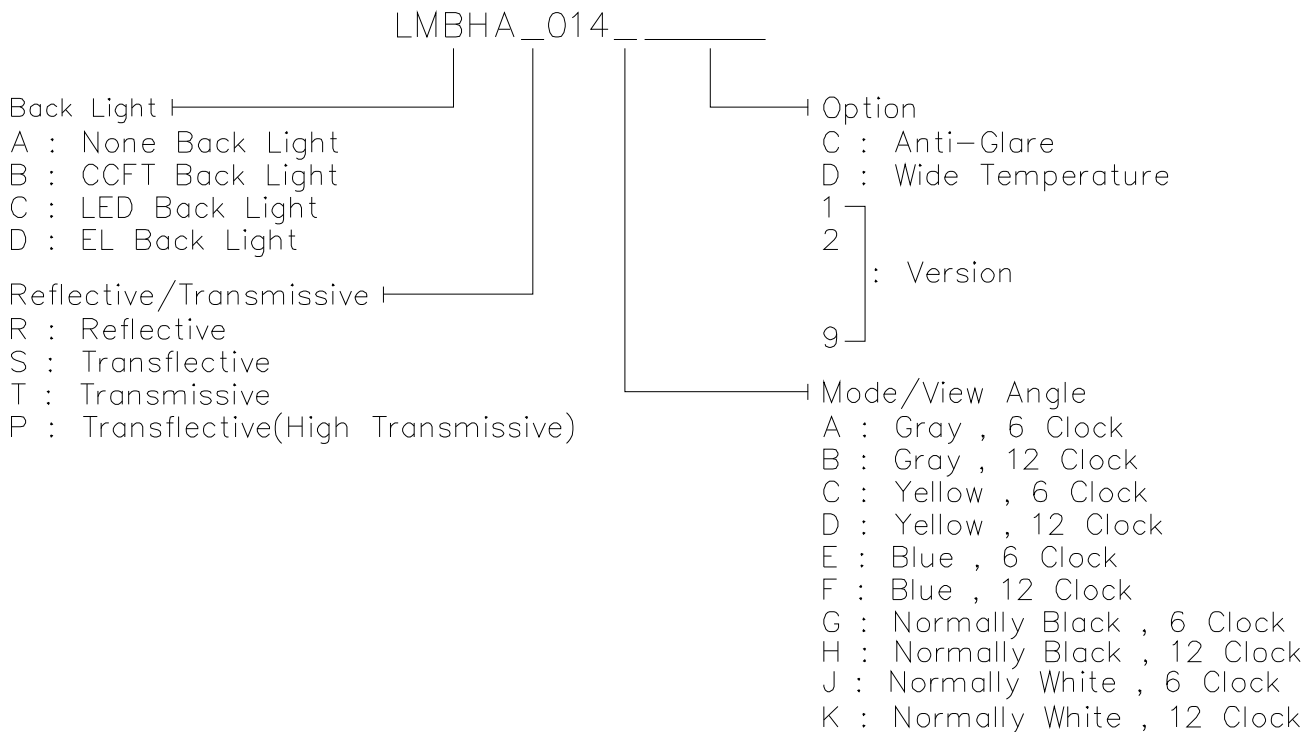

2. ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

GND=0V Standard

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD-GND	0	5.5	V	
Power Supply for LC Drive	VDD-VEE	0	24.0	V	
Input Voltage	VI	GND	VDD	V	
CCFL Driving Voltage	VFL	0	500	Vrms	
CCFL Input Current	IFL	-	7.0	mArms	
Static Electricity	-	-	-	-	Note 1

Note 1 LCM should be grounded during handling LCM.

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	NORMAL TEMP.				WIDE TEMP.			
	OPERATING		STORAGE		OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	0	50	-20	70	-20	70	-30	80
Humidity (Without Condensation)	Note 2,4		Note 3,4		Note 4,5		Note 4,6	

Note 2 $T_a \leq 50^\circ\text{C}$: 85% RH max

$T_a > 50^\circ\text{C}$: Absolute humidity must be lower than the humidity of 85%RH at 50°C

Note 3 T_a at -20°C will be $< 48\text{hrs}$, at 70°C will be $< 120\text{hrs}$

Note 4 Background color changes slightly depending on ambient temperature. This phenomenon is reversible.

Note 5 $T_a \leq 70^\circ\text{C}$: 75%RH max.

$T_a > 70^\circ\text{C}$: Absolute humidity must be lower than the humidity of 75%RH at 70°C

Note 6 T_a at -30°C will be $< 48\text{hrs}$, at 80°C will be $< 120\text{hrs}$



REV/DATE	R0/ 10.08.98'					APP	CHK	BY
----------	------------------	--	--	--	--	-----	-----	----

3.0 ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	
Logic Circuit Power Supply	VDD-GND	-	4.5	5.0	5.5	V	
LCD Driver Power Supply (Normal Temp. LCM)	VDD-VEE	VDD=5.0V 1/13 Bias	0°C	-	19.9	21.1	V
			25°C	17.8	18.5	19.2	V
			50°C	16.6	17.0	-	V
LCD Driver Power Supply (Wide Temp. LCM)	VDD-VEE	VDD=5.0V 1/13 Bias	-20°C	-	20.8	21.6	V
			0°C	19.0	19.8	20.4	V
			25°C	18.9	19.7	20.3	V
			50°C	18.8	19.6	20.2	V
			70°C	18.1	18.9	-	V
Input Voltage	VIH	H level	0.7VDD	-	VDD	V	
	VIL	L level	GND	-	0.3VDD	V	
Power Consumption For LCD	Pd	VDD = 5.0V VEE = -13.5V	-	80	-	mW	
Supply Current (LCD)	IDD	VDD = 5.0V VEE = -13.5V	-	8.6	-	mA	
	IEE		-	2.7	-		
CCFL Staring Voltage	VFLS	-	-	900	-	Vrms	
CCFL Driving Voltage	VFLD	-	-	450	-	Vrms	
CCFL Driving Current	IFLD	VFLD = 450Vrms fFL = 30kHz					
CCFL Driving Frequency	fFL	-	15	30	50	KHZ	

3.1 BRIGHTNESS CHARACTERISTICS

VDD: 5V VDD-VEE: 19.1V VDD-VEE: 19.1V CCFL CONDITION at ABOVE TABLE

ITEM	CONDITION	MIN.	TYP.	MAX.	UNIT
BRIGHTNESS of LCM (LMBHAT014GX)		-	5.27	-	cd/m ²
		-	124.0	-	cd/m ²

4.OPTICAL CHARACTERISTICS

(FOR NORMAL TEMPERATURE MODE LCM)

AT V_{OP}

ITEM MODE		Cr(Contrast Ratio)		θ (Viewing Angle)		ϕ (Viewing Angle)	
		25℃		25℃		25℃	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
R	A	—	—	—	—	—	—
	C	—	—	—	—	—	—
	J	4	6	40	60	25	35
S	A	—	—	—	—	—	—
	C	—	—	—	—	—	—
	J	3.5	6	40	55	20	30
T	C	—	—	—	—	—	—
	E	3	6	35	65	25	40
	G	6	15	45	90	30	50
note		NOTE6		NOTE5			

note:

R: REFLECTIVE
S: TRANSFLECTIVE
T: TRANSMISSIVE
A: GRAY

C: YELLOW
E: BLUE
G: NORMALLY BLACK
J: NORMALLY WHITE

AT $\phi=0^\circ \theta=0^\circ$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	0℃	—	500	1000	ms	NOTE 2
		25℃	—	120	240		
		50℃	—	70	140		
Response Time (fall)	Tf	0℃	—	700	1200	ms	NOTE 2
		25℃	—	140	260		
		50℃	—	80	150		

(FOR WIDE TEMPERATURE MODE LCM)

AT V_{OP}

ITEM MODE		Cr(Contrast Ratio)		θ (Viewing Angle)		ϕ (Viewing Angle)	
		25°C		25°C		25°C	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
R	C	3	4	40	60	28	35
	J	4	6.5	35	52	25	33
S	A	3	4	40	60	28	35
T	A	—	2.5	20	40	15	20
	E	3	4	40	60	15	25
	G	5	10	50	86	35	50
note		NOTE6			NOTE5		

note:


- | | |
|------------------|-------------------|
| R: REFLECTIVE | C: YELLOW |
| S: TRANSFLECTIVE | E: BLUE |
| T: TRANSMISSIVE | G: NORMALLY BLACK |
| A: GRAY | J: NORMALLY WHITE |

AT $\phi=0^\circ \theta=0^\circ$


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	-20°C	—	2200	4400	ms	NOTE 2
		0°C	—	440	880		
		25°C	—	120	240		
		50°C	—	60	120		
		70°C	—	50	100		
Response Time (fall)	Tf	-20°C	—	3000	5000	ms	NOTE 2
		0°C	—	550	1100		
		25°C	—	180	350		
		50°C	—	80	150		
		70°C	—	70	130		

(NOTE 1)

Definition of Operation Voltage(Vop)

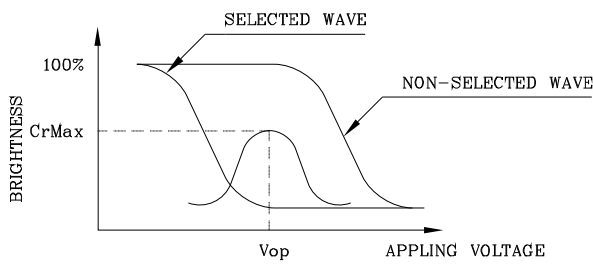

(positive type)

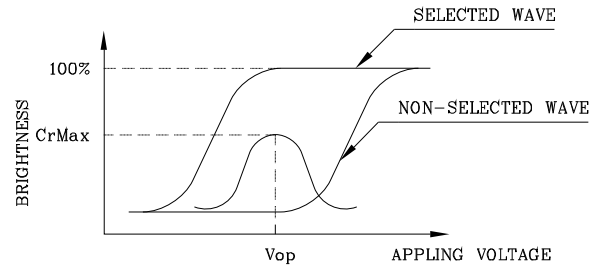


(negative type)

*Conditions


Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(Tr,Tf)

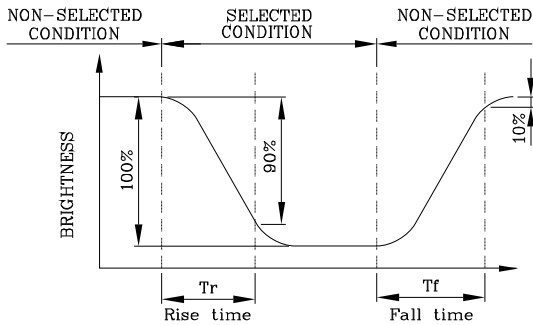

(positive type)

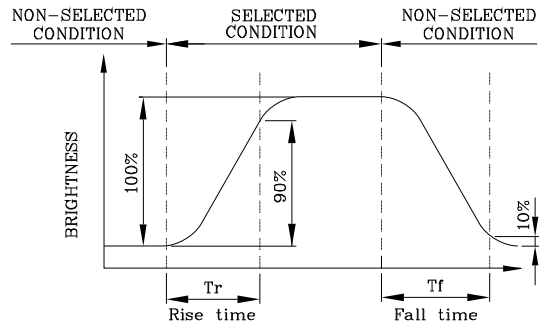


(negative type)

*Conditions

Operating Voltage : Vop
Viewing Angle (θ,φ) : (0,0)
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias


(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

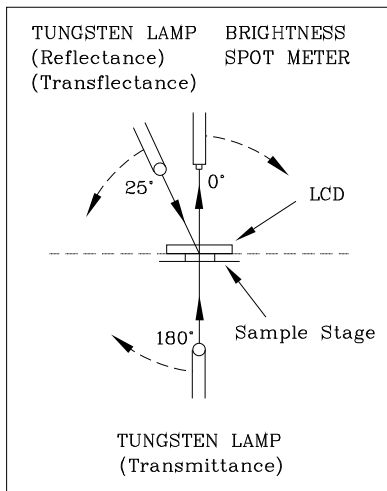


CONST.
TEMP.
CHAMBER

Multiplex Driving (1/N duty 1/a bias)

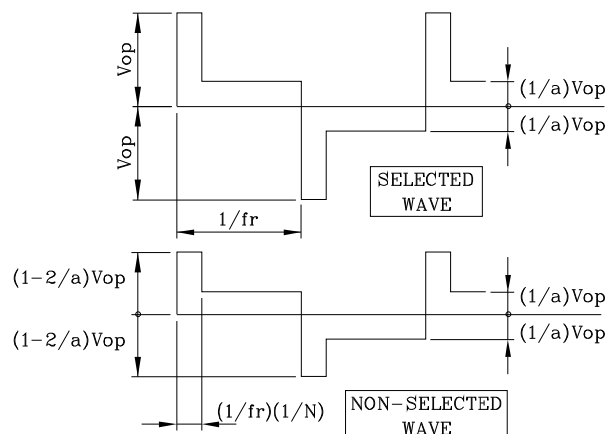



(NOTE 4)

Definition of Viewing Direction

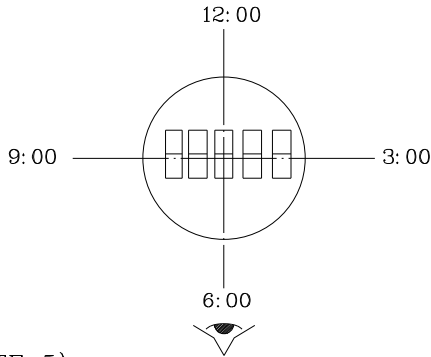

(NOTE 5)

Definition of Viewing Angle

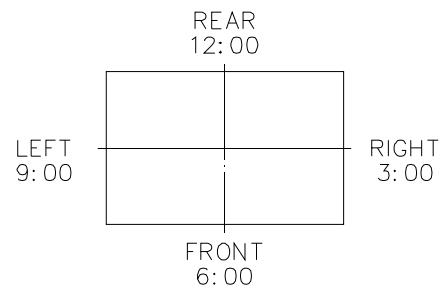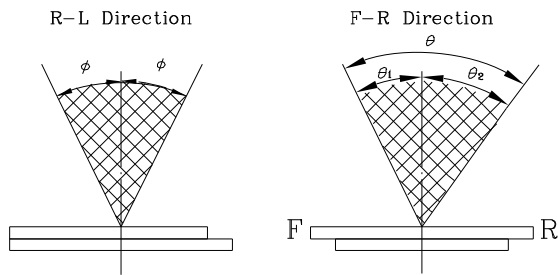

*For This Product

The Viewing Direction Is 6 O'clock
So $\theta_1 > \theta_2$


$$\theta = \theta_1 + \theta_2$$

*Conditions


Operating Voltage : V_{op}
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias
Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

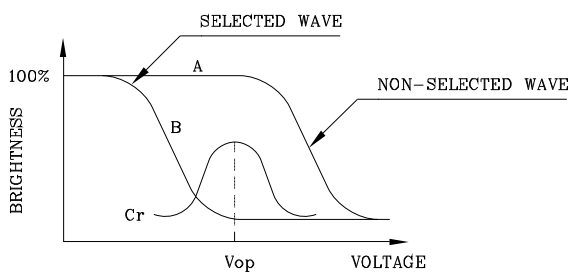

(positive type)

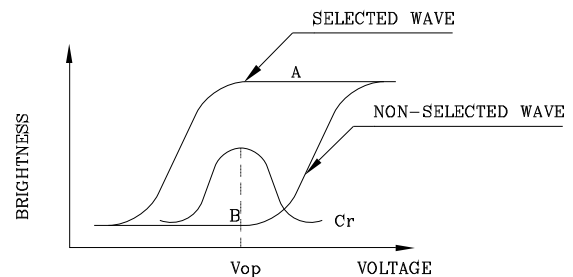

(negative type)


$$\text{Contrast Ratio : } Cr = A/B$$

*Conditions


Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

REV/DATE	R0/ 10.08.98'					APP	CHK	BY
----------	------------------	--	--	--	--	-----	-----	----

5. BLOCK DIAGRAM

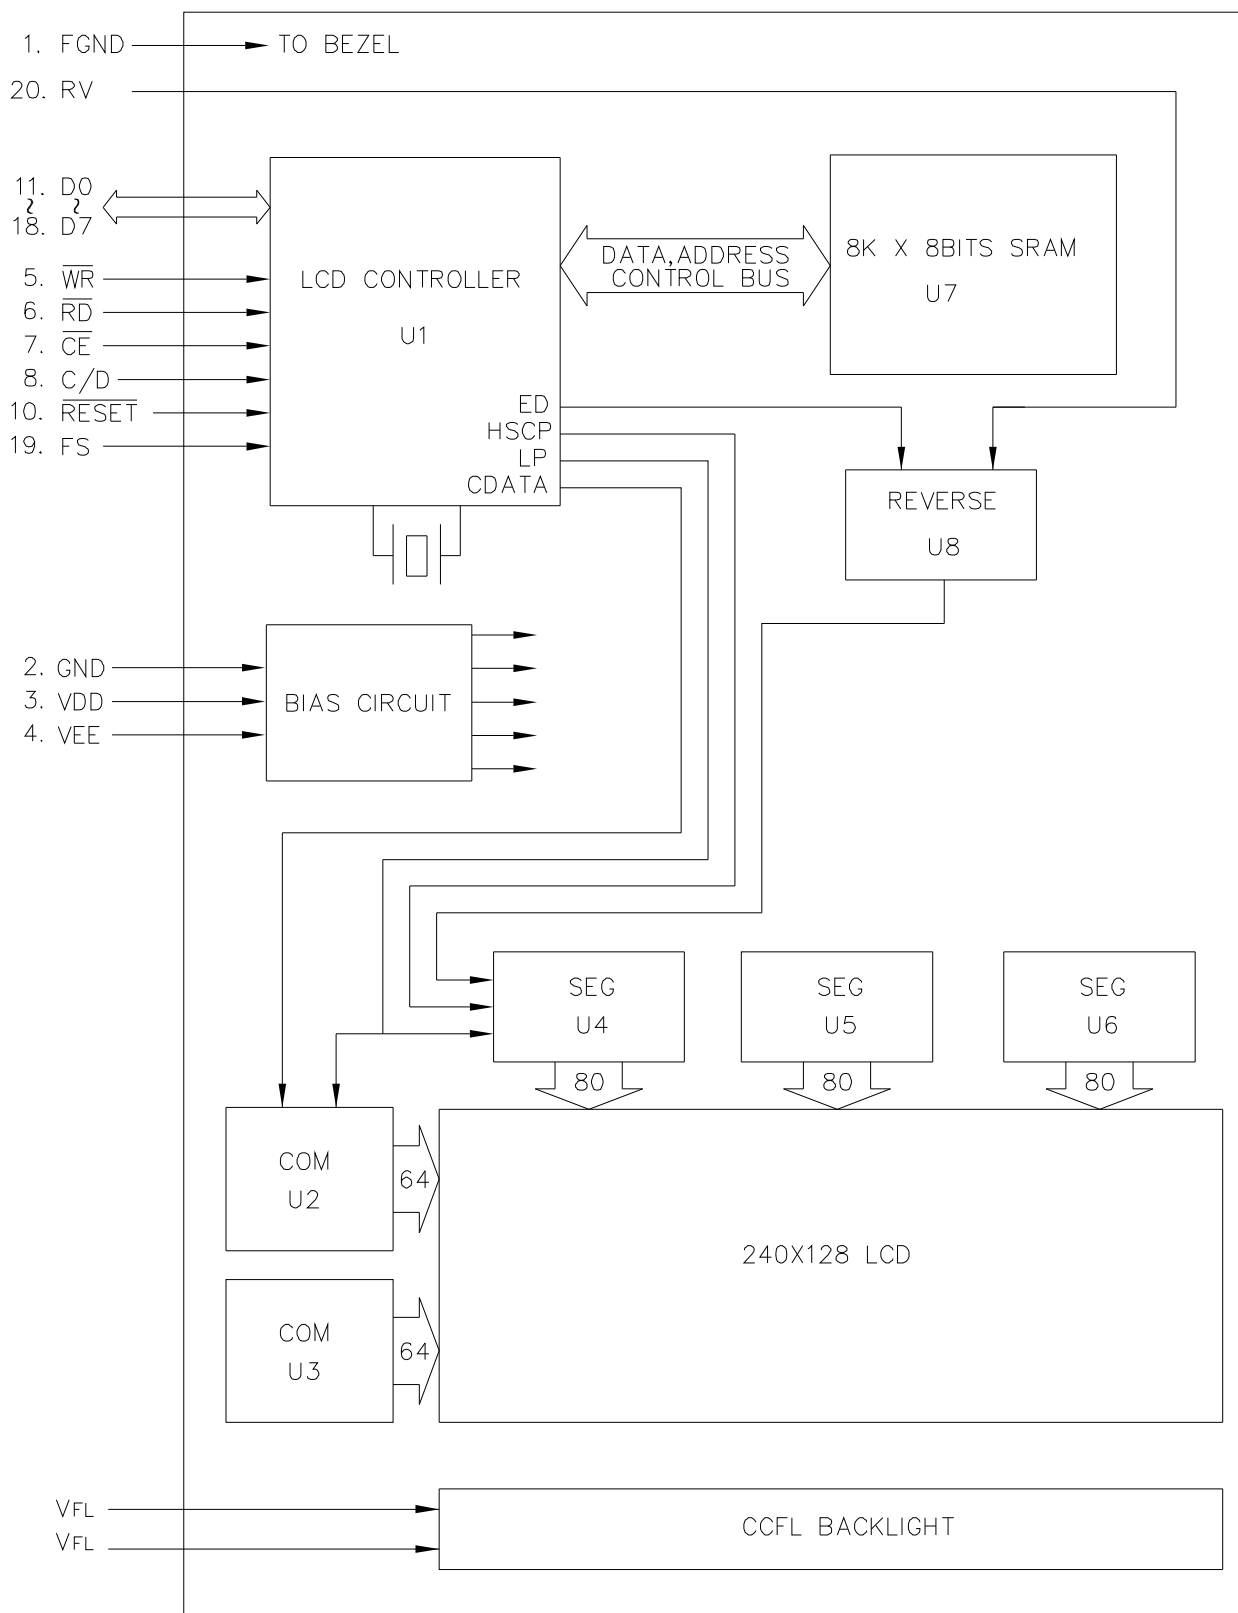

7. POWER SUPPLY

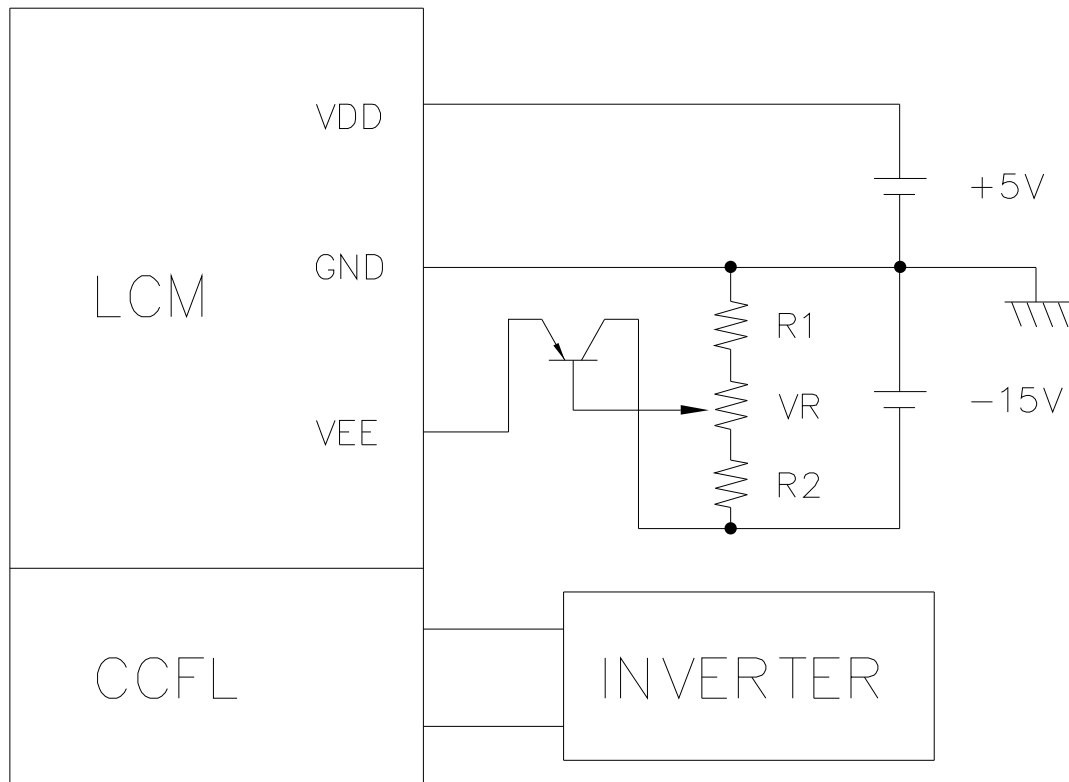

1. $R1 + VR + R2 = 10K \sim 20K$
2. Recommended CCFL Inverter : L10L

8. TIMING CHARACTERISTICS

8-1 INTERFACE TIMING

@VDD = 5V±10%

ITEM	ITEM	CONDITION	MIN.	MAX.	UNIT
C/D SET UP TIME	t_{CDS}	Fig.	100	-	ns
C/D HOLD TIME	t_{CDH}	Fig.	10	-	ns
$\overline{CE}, \overline{RD}, \overline{WR}$ CLOCK WIDTH	t_{CP}, t_{RP}, t_{WP}	Fig.	80	-	ns
DATA SET UP TIME	t_{DS}	Fig.	80	-	ns
DATA HOLD TIME	t_{DH}	Fig.	40	-	ns
ACCESS TIME	t_{ACC}	Fig.	-	150	ns
DATA OUTPUT HOLD TIME	t_{OH}	Fig.	10	50	ns


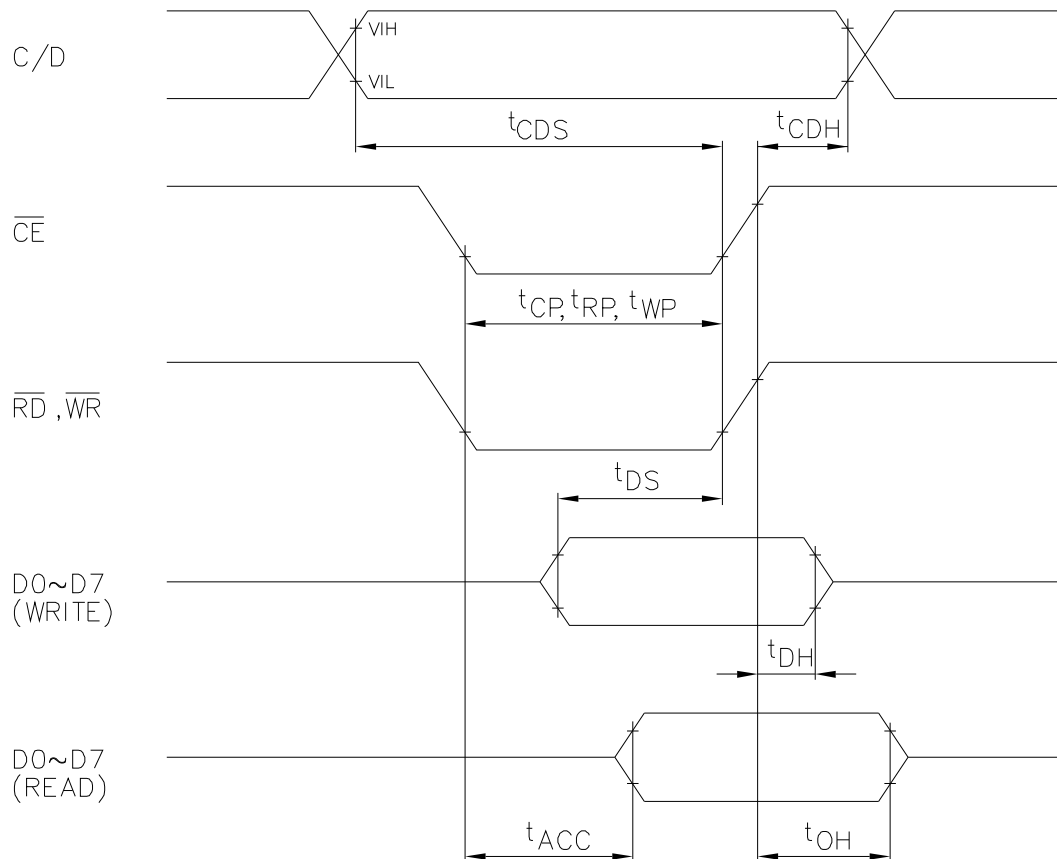



Fig. INTERFACE TIMING CHART

8-2 POWER ON/OFF TIMING

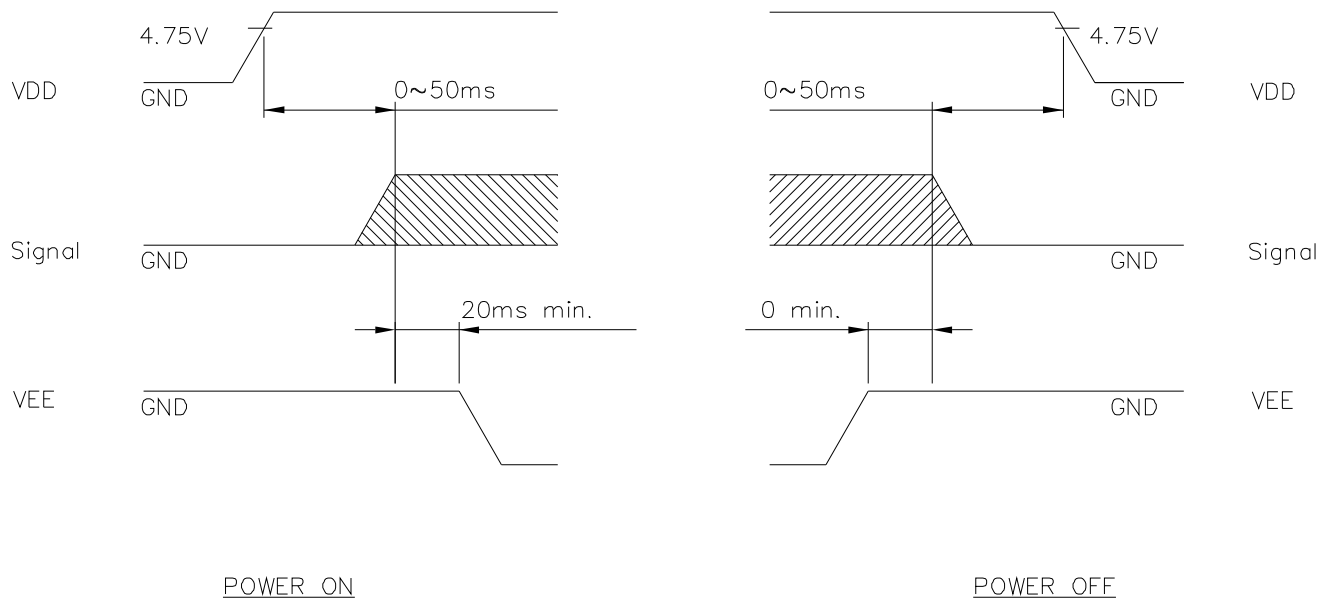

The missing pixels may occur when the LCM is driven beyond above power interface timing sequence.

9. DISPLAY PATTERN

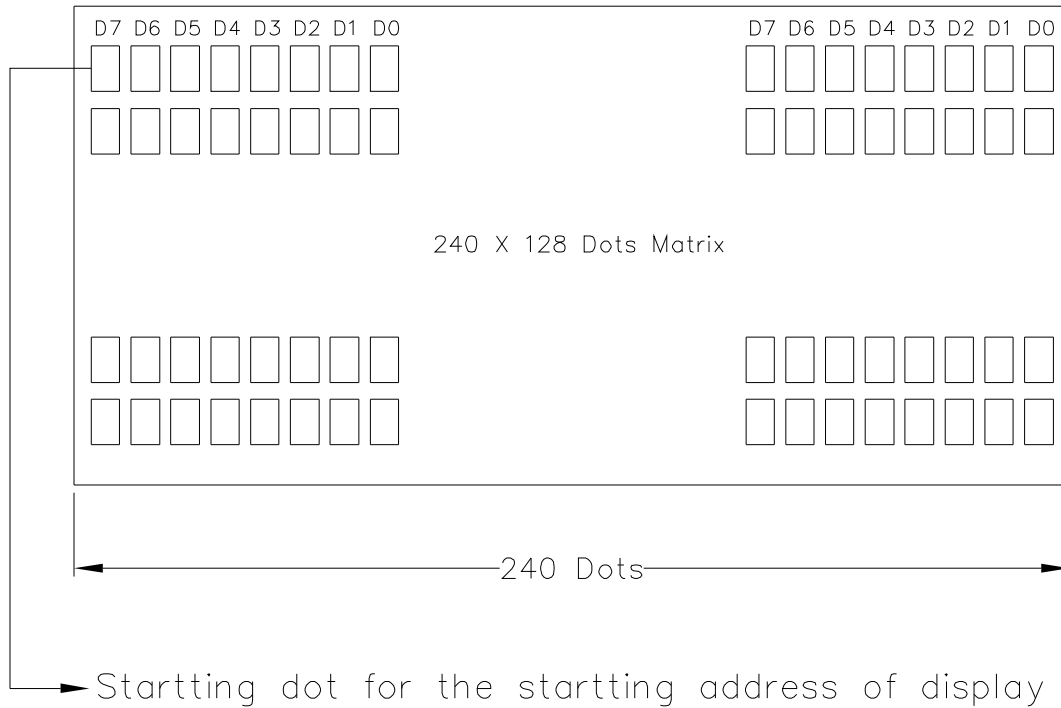

D0~D7 are 8 bits transmitted data, where D0 is LSB and D7 is MSB.

9-2 COMMAND LIST

COMMAND	CODE	D1	D2	FUNCTION
REGISTER SET	00100001	X address	X address	Cursor pointer set
	00100010	Data	00H	Offset register set
	00100100	Low address	High address	Address pointer set
CONTROL WORD SET	01000000	Low address	High address	Text home address set
	01000001	Columns	00H	Text area set
	01000010	Low address	High address	Graphic home address set
	01000011	Columns	00H	Graphic area set
MODE SET	1000X000	—	—	"OR" mode
	1000X001	—	—	"EXOR" mode
	1000X011	—	—	"AND" mode
	1000X100	—	—	"Text attribute" mode
	10000XXX	—	—	Internal CG ROM mode
	10001XXX	—	—	External CG RAM mode
DISPLAY MODE	10010000	—	—	Display off
	1001XX10	—	—	Cursor on, blink off
	1001XX11	—	—	Cursor on, blink on
	100101XX	—	—	Text on, graphic off
	100110XX	—	—	Text off, graphic on
	100111XX	—	—	Text on, graphic on
CURSOR PATTERN SELECT	10100000	—	—	1 line cursor
	10100001	—	—	2 lines cursor
	10100010	—	—	3 lines cursor
	10100011	—	—	4 lines cursor
	10100100	—	—	5 lines cursor
	10100101	—	—	6 lines cursor
	10100110	—	—	7 lines cursor
	10100111	—	—	8 lines cursor
DATA AUTO READ/WRITE	10110000	—	—	Data auto write set
	10110001	—	—	Data auto read set
	10110010	—	—	Auto reset
DATA READ WRITE	11000000	Data	—	Data write and ADP increment
	11000001	—	—	Data read and ADP increment
	11000010	Data	—	Data write and ADP decrement
	11000011	—	—	Data read and ADP decrement
	11000100	Data	—	Data write and ADP nonvariable
	11000101	—	—	Data read and ADP nonvariable
SCREEN PEEK	11100000	—	—	Screen peek
SCREEN COPY	11101000	—	—	Screen copy
BIT SET/RESET	11110XXX	—	—	bit reset
	11111XXX	—	—	bit set
	1111X000	—	—	bit0(LSB)
	1111X001	—	—	bit1
	1111X010	—	—	bit2
	1111X011	—	—	bit3
	1111X100	—	—	bit4
	1111X101	—	—	bit5
	1111X110	—	—	bit6
	1111X111	—	—	bit7(MSB)

* STATUS READ

Before sending data (read/write), command it is necessary to check the status.

T6963C status word format is following :


LSB	D0	STA0	Check capability of command execution	0: Disable 1: Enable
	D1	STA1	Check capability of data read/write	0: Disable 1: Enable
	D2	STA2	Check capability of auto mode data read	0: Disable 1: Enable
	D3	STA3	Check capability of arto mode data write	0: Disable 1: Enable
	D4	STA4	Not use	
	D5	STA5	Check capability of controller operation	0: Disable 1: Enable
	D6	STA6	Error flag. Using screen peek/copy command	0: Disable 1: Enable
MSB	D7	STA7	Check the condition blink	0: Disable 1: Enable

Note 1: It is necessary to check STA0 and STA1 at the same time. The error is happened by sending data at executing command.

Note 2: The status check will be enough to check STA0/STA1.

Note 3: STA2/STA3 are valid in auto mode STA0/STA1 are invalid.

Status checking flow

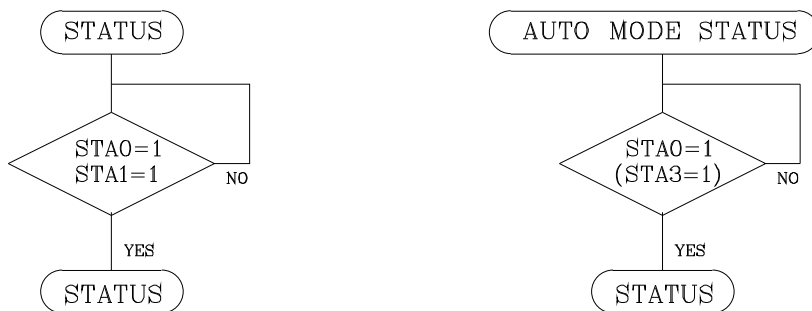



Note 4: It is impossible to save status check in the case of command of MSB0. To have the delay time cannot be save status check. The interrupt of hardware is happened at the end of lines. If command of MSB0 is sent in this period, the command executing is waited. The state of waiting doesn't disregarded or rewrites data of waiting command.

10. RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Leaving	70°C	120HR		Appearance without defect	
2	Low Temp. Leaving	-20°C	120HR		Appearance without defect	
3	High Temp. & High Humi. Leaving	40°C 90%RH	120HR		Appearance without defect	
4	Thermal Shock	-20°C,30min → 25°C,5min → 60°C,30min → 25°C,5min (1cycle)			Appearance without defect	5 cycles

LCD PRODUCT QUALITY STANDARD

(1) DISPLAY APPEARANCE

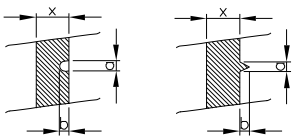NO	ITEM	C R I T E R I A													
1.	INCLUSIONS (BLACK SPOT , WHITE SPOT , DUST)	(1) ROUND TYPE													
		<table border="1"> <thead> <tr> <th>DIAMETER mm (a*)</th> <th>NO. OF DEFECT*</th> </tr> </thead> <tbody> <tr> <td>$a \leq 0.20$</td> <td>NEGLECT</td> </tr> <tr> <td>$0.20 < a \leq 0.35$</td> <td>5 MAX</td> </tr> <tr> <td>$a > 0.35$</td> <td>NONE</td> </tr> </tbody> </table>	DIAMETER mm (a*)	NO. OF DEFECT*	$a \leq 0.20$	NEGLECT	$0.20 < a \leq 0.35$	5 MAX	$a > 0.35$	NONE					
DIAMETER mm (a*)	NO. OF DEFECT*														
$a \leq 0.20$	NEGLECT														
$0.20 < a \leq 0.35$	5 MAX														
$a > 0.35$	NONE														
		(2) LINEAR TYPE													
		<table border="1"> <thead> <tr> <th>LENGTH mm(L)</th> <th>WIDTH mm(W)</th> <th>NO. OF DEFECT</th> </tr> </thead> <tbody> <tr> <td>N A</td> <td>$W \leq 0.03$</td> <td>NEGLECT</td> </tr> <tr> <td>$L \leq 3$</td> <td>$0.03 < W \leq 0.08$</td> <td>6</td> </tr> <tr> <td>$3 < L$</td> <td>$0.08 < W$</td> <td>NONE</td> </tr> </tbody> </table>	LENGTH mm(L)	WIDTH mm(W)	NO. OF DEFECT	N A	$W \leq 0.03$	NEGLECT	$L \leq 3$	$0.03 < W \leq 0.08$	6	$3 < L$	$0.08 < W$	NONE	
LENGTH mm(L)	WIDTH mm(W)	NO. OF DEFECT													
N A	$W \leq 0.03$	NEGLECT													
$L \leq 3$	$0.03 < W \leq 0.08$	6													
$3 < L$	$0.08 < W$	NONE													
2.	SCRATCH	1.SCRATCH ON PROTECTIVE FILM IS PERMITTED . 2.SCRATCH ON POLARIZER SHALL BE AS FOLLOW: (1) ROUND TYPE													
		<table border="1"> <thead> <tr> <th>DIAMETER mm (a*)</th> <th>NO. OF DEFECT*</th> </tr> </thead> <tbody> <tr> <td>$a \leq 0.15$</td> <td>NEGLECT</td> </tr> <tr> <td>$0.15 < a \leq 0.20$</td> <td>2 MAX</td> </tr> <tr> <td>$a > 0.20$</td> <td>NONE</td> </tr> </tbody> </table>	DIAMETER mm (a*)	NO. OF DEFECT*	$a \leq 0.15$	NEGLECT	$0.15 < a \leq 0.20$	2 MAX	$a > 0.20$	NONE					
DIAMETER mm (a*)	NO. OF DEFECT*														
$a \leq 0.15$	NEGLECT														
$0.15 < a \leq 0.20$	2 MAX														
$a > 0.20$	NONE														
		(2) LINEAR TYPE BE JUDGED BY 1.-(2) LINEAR TYPE													
3.	DENT	DIAMETER < 1.5mm													
4.	BUBBLE	NOT EXCEEDING 0.5mm AVERAGE DIAMETER IS ACCEPTABLE BETWEEN GLASS AND POLARIZING FILM.													
5.	PIN HOLE	$(a+b)/2 \leq 0.15$ mm MAXIMUM NUMBER: IGNORED $0.15 < (a+b)/2 \leq 0.20$ MAXIMUM NUMBER: 10													
6.	DOT DEFECT	$(a+b)/2 \leq 0.20$ mm MAXIMUM NUMBER: IGNORED $0.20 < (a+b)/2 \leq 0.30$ MAXIMUM NUMBER: 5 x = WIDTH													
7.	CONTRAST IRREGULARITY (SPOT)	DIAMETER SPEC. $a \leq 0.50$ mm $0.50 < a \leq 0.75$ $0.75 < a \leq 1.00$ $1.00 < a$	NO. OF DEFECT* NEGLECT 5 3 NONE												
8.	DOT WIDTH	DESIGN WIDTH±15%													
9.	COLOR TONE AND UNIFORMITY	OBVIOUS UNEVEN COLOR IS NOT PERMITTED													

(2) NOTE:

- SAFETY

- 1.If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin.
- 2.If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.

- HANDLING

- 1.Avoid static electricity which can damage the CMOS LSI.
- 2.Do not remove the panel or frame from the module.
- 3.The polarizing plate of the display is very fragile. So, please handle it very carefully.
- 4.Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- 5.Do not use ketonics solvent & Aromatic solvent, use with a soft cloth soaked with a cleaning naphtha solvent.

- STORAGE

- 1.Store the panel or module in a dark place where the temperature is $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$ and the humidity is below 65% RH.
- 2.Do not place the module near organics solvents or corrosive gases.
- 3.Do not crush, shake, or jolt the module.

- TERMS OF WARRANT


- 1.Acceptance inspection period
The period is within one month after the arrival of contracted commodity at the buyer's factory site.
- 2.Applicable warrant period
The period is within twelve months since the date of shipping out under normal using and storage conditions.

- THE AVERAGE LIFE TIME OF BACK LIGHT

CCFL : 20,000HR


LCD VIBRATION & DROP TEST

NO	ITEM	CONDITIONS		Sample	RESULT	
1.	Vibration Test	a. Frequency	5 → 13.95Hz 13.95 → 33Hz 33 → 51Hz 51 → 500Hz	Displacement: 0.2inch Acceleration: 2G Displacement: 0.036inch Acceleration: 5G	18 pcs	OK
		b. Time	20 min. ± 1 min. X.Y.Z 3 Direction			
	Total Time	60 min. ± 3 min.				
2.	Drop Test	Three-time free drop In X.Y.Z direction & One conner from a height of 70cm about ground		18 pcs	OK	

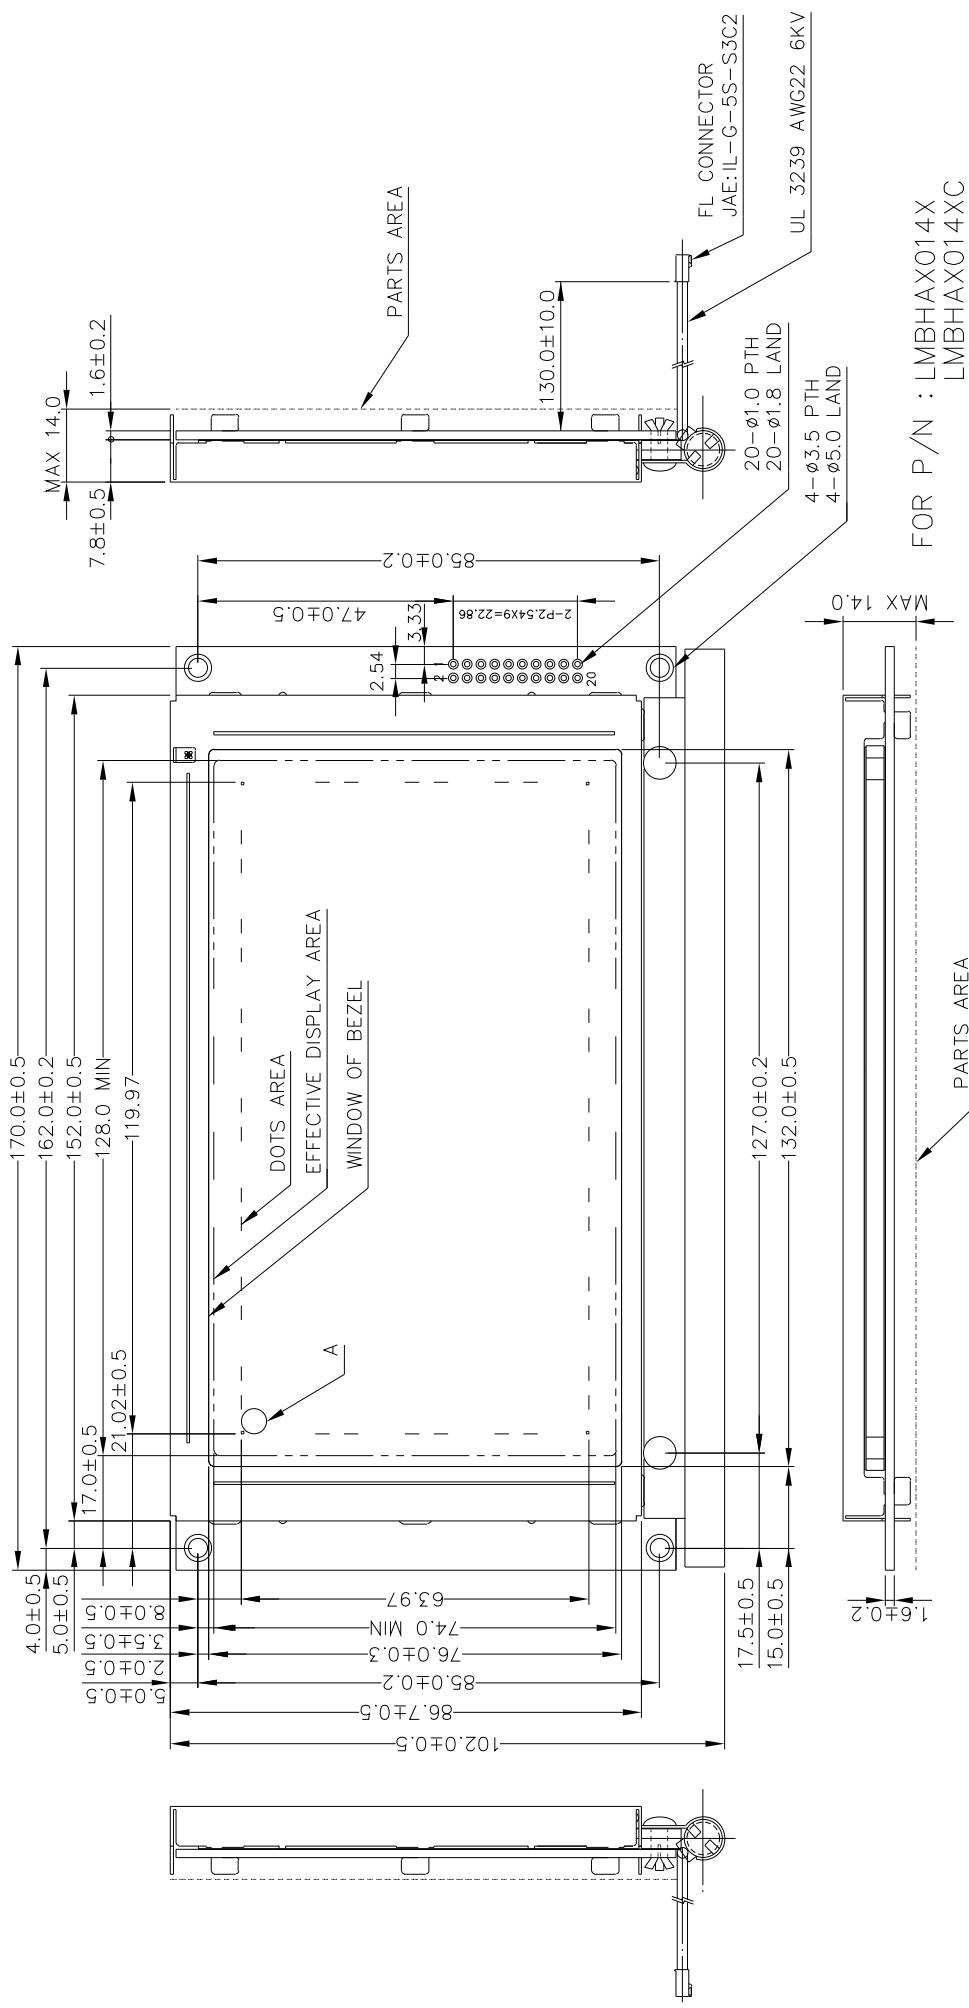

FOR P/N : LMBHAX014X
 LMBHAX014XC
 LMBHAX014XCK
 LMBHAX014XCZ
 LMBHAX014XCD
 LMBHAX014XD
 LMBHAX014XCD
 LMBHAX014XC
 LMBHAX014X4C
 LMBHAX014X4CK
 LMBHAX014X5

- NOTES :
1. RESOLUTION : 240 X 128 Dots
 2. CONTROLLER : T6963C(Toshiba)
 3. DC/DC : Without
 4. GENERAL TOLERANCE : ±0.5 mm



PIN NO.	1	2	3	4	5	6	7	8	9	10
SYMBOL	FGND	GND	VDD	VEE	WR	RD	CE	C/D	NC	RESET
PIN NO.	11	12	13	14	15	16	17	18	19	20
SYMBOL	D0	D1	D2	D3	D4	D5	D6	D7	FS	RV

產品編號	LMBHAX014XXX		南亞塑膠工業股份有限公司
APPROVE	NAME	DATE	製成品
CHECK			
DESIGN			
DRAW	MAY PING	87.10.28	
			UNIT : mm
			SCALE : 2/3
			THIRD ANGLE PROJECT
			DWG-NO MB-X014XXX Rev.B